
Dimensioned floor plan

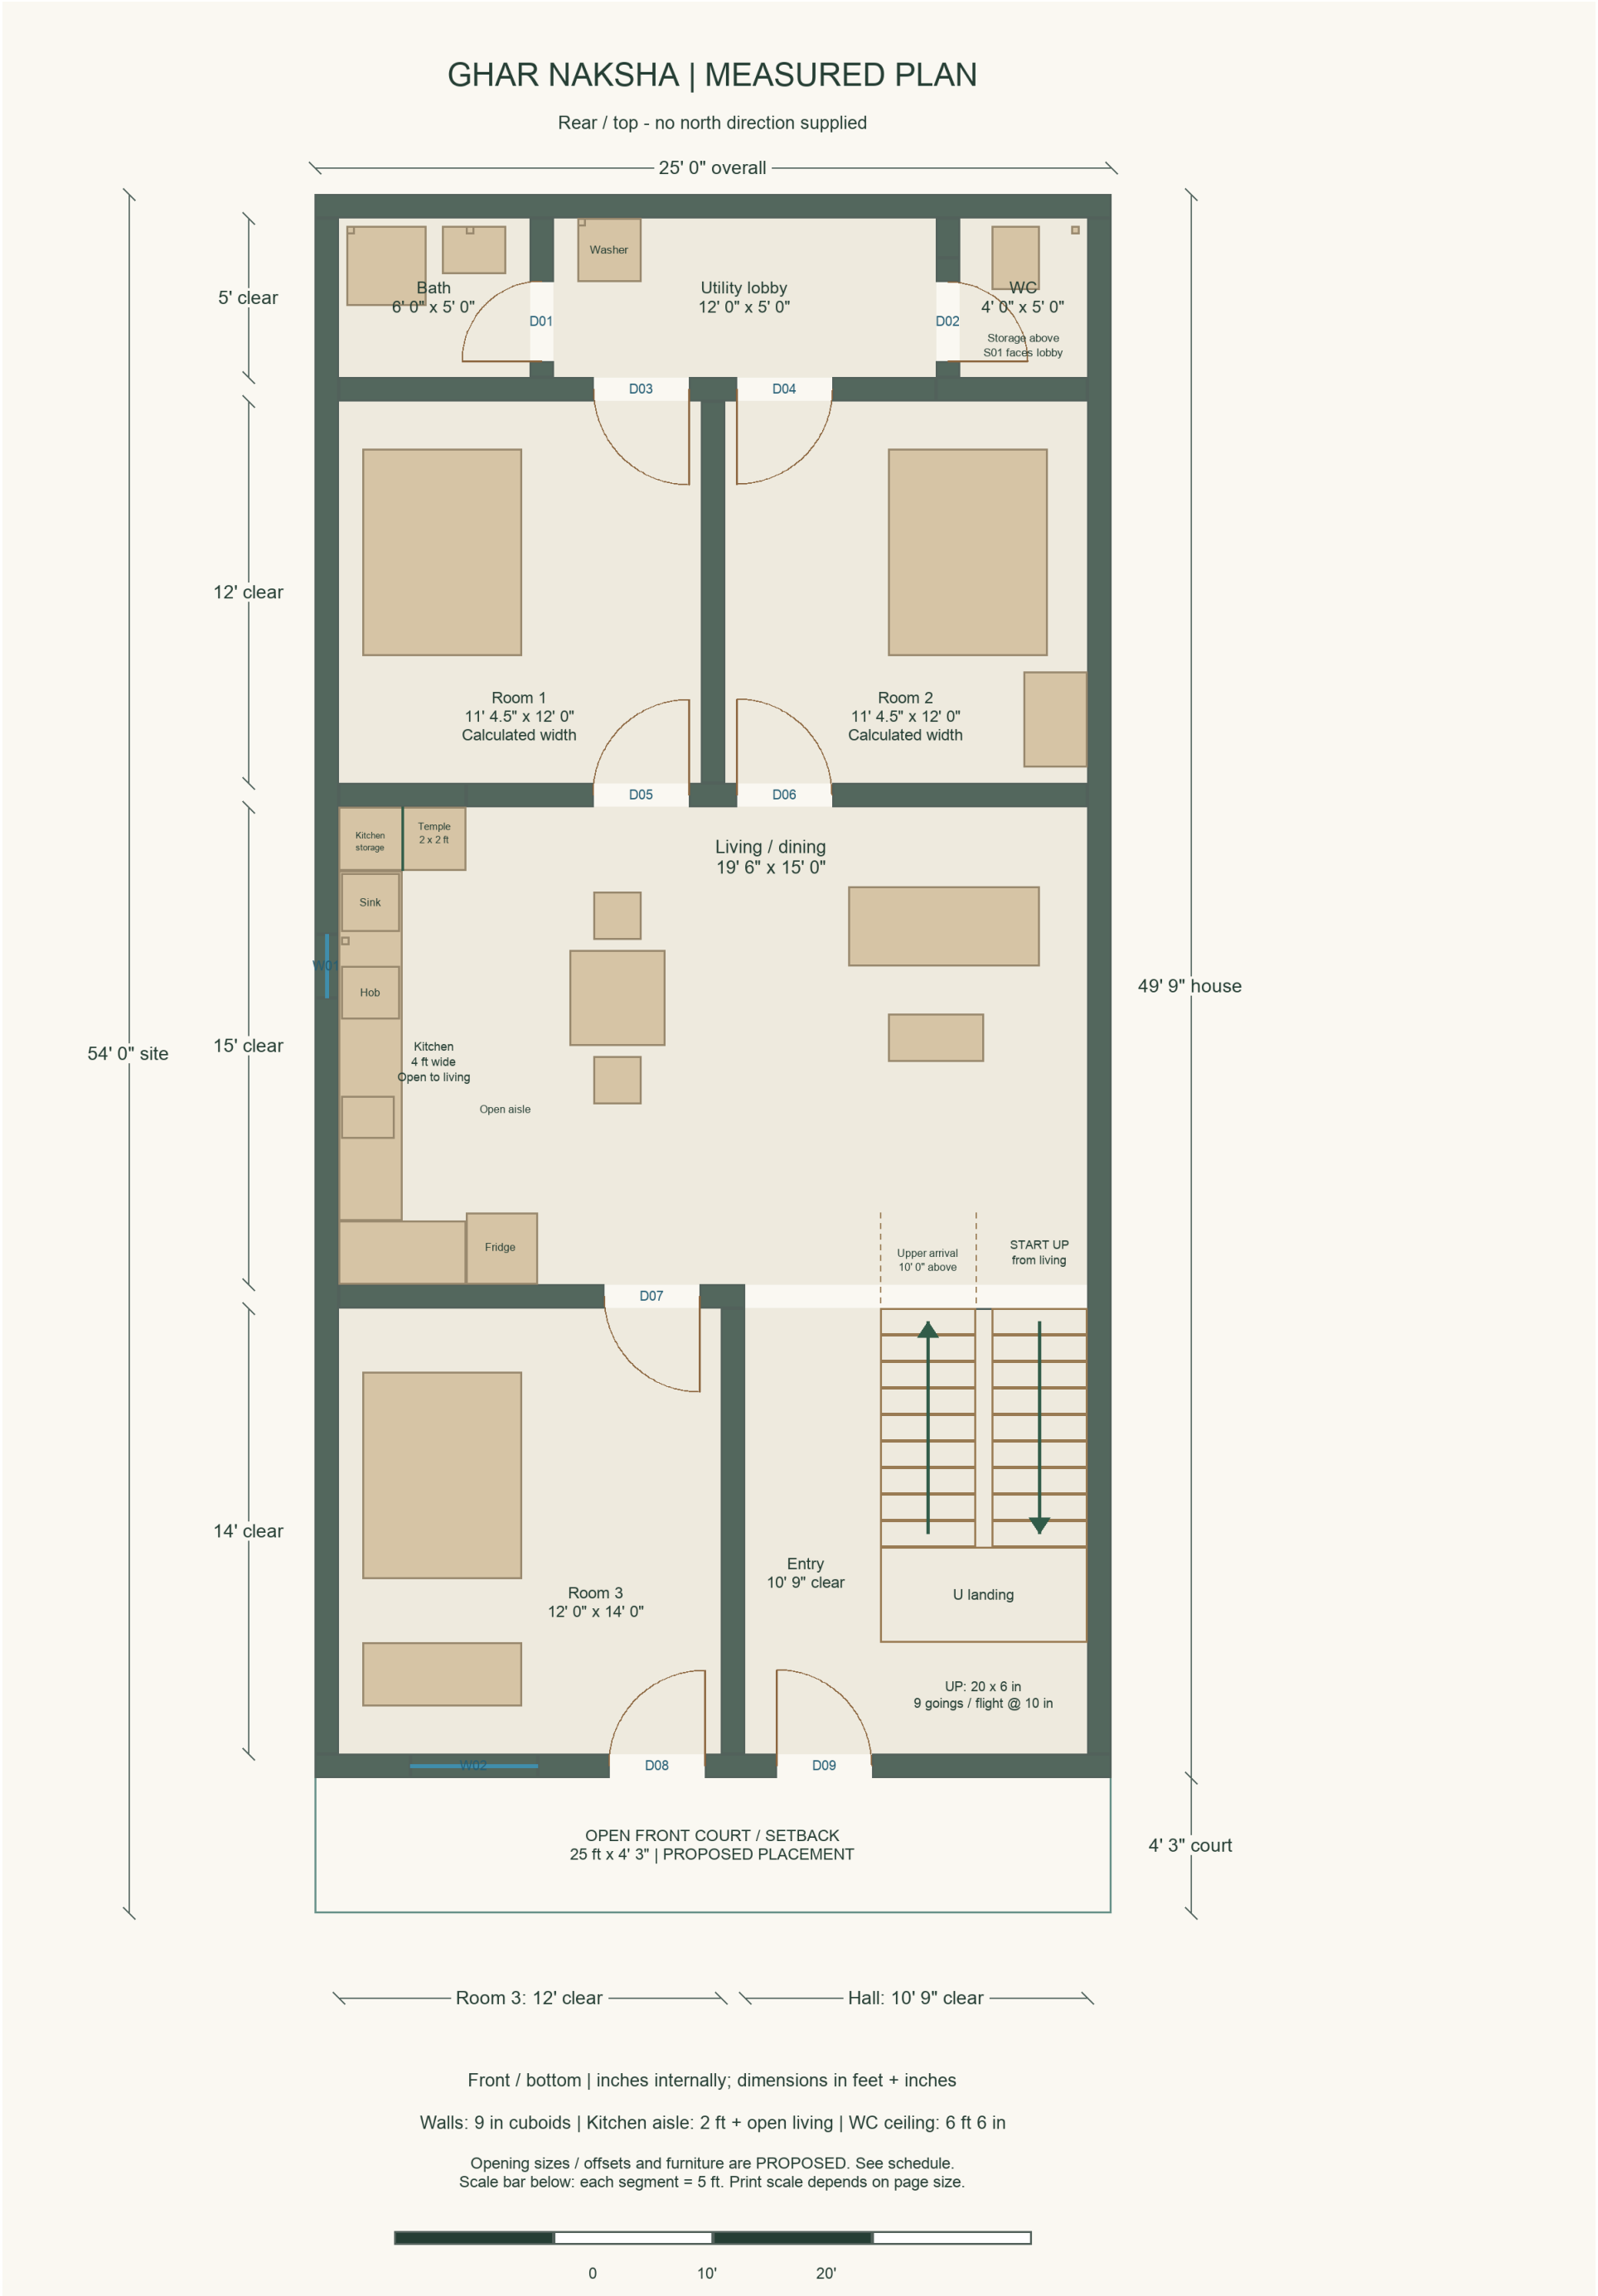

Dimension ledger and design assumptions

FROM SKETCH / USER

Site: 25 ft x 54 ft. All walls: 9 in. Building wall height: 9 ft.

FROM SKETCH / USER

Clear bands: 5 ft; 12 ft; 15 ft; 14 ft.

FROM SKETCH / USER

Bath 6 ft x 5 ft; WC 4 ft x 5 ft; WC enclosure 6 ft 6 in high.

FROM SKETCH / USER

Kitchen 4 ft x 15 ft; Room 3 12 ft x 14 ft; temple 3 ft high.

CALCULATED

Inside width: 23 ft 6 in. Room 1 / 2: 11 ft 4.5 in each.

CALCULATED

Room clear bands 46 ft + five 9 in walls = 49 ft 9 in.

CALCULATED

54 ft site minus 49 ft 9 in footprint = 4 ft 3 in court.

CALCULATED

Utility lobby 12 ft x 5 ft; front right hall 10 ft 9 in x 14 ft.

PROPOSED

Court placed at front. Kitchen open to living; no extra partition.

FROM USER

Temple niche 2 ft wide x 2' 0" deep beneath 4 ft return; height 3 ft; wardrobe height proposed 5' 0".

PROPOSED

Wardrobe at z=3 ft on temple; full 4 ft x 2' 0" return footprint.

PROPOSED

Wardrobe recess A01 faces Room 1; shrine opens toward living and kitchen; 1 in separator proposed.

FROM USER

2 ft counter along left wall with 4 ft returns at Room 1 and Room 3; sink toward temple.

CALCULATED

Kitchen aisle: 2 ft within kitchen + open living; protected open width 5 ft.

PROPOSED

WC loft: 4 ft x 5 ft x 2' 3"; base 6' 9"; hatch S01 to lobby.

PROPOSED

Floor-to-floor 10' 0"; slab 0' 6"; upper roof underside 19' 0".

CALCULATED

20 risers @ 6 in; 9 independent goings per flight @ 10 in.

PROPOSED

Flights 3' 0" clear; landing 3' 0"; stair 6' 6" x 10' 6".

PROPOSED

Straight sloping underside, proposed 1 ft vertical waist; full shaft void; headroom 9 ft.

FROM USER

Start from living on right-wall flight; return on left; no separating wall.

PROPOSED

Arrival platform 10' 0"; approach underneath 9' 6".

PROPOSED

Scaled appliances: fridge, washer, microwave, chimney, purifier, TV, geyser, AC, fans and lights.

LIMIT

No north direction supplied. Structural supports / lintels require design.

CHECKS

Dimensions, 9 in walls, openings, stair fit and aisle checks passed.

Opening schedule - exact sizes / offsets PROPOSED

Coordinates: inches from rear-left site corner; offset from wall start.

D01 | bath-divider | door | into bath | hinge high offset; 90 deg
Width 2' 6"; height 6' 6"; sill 0' 0"; offset 2' 0"; start x=85.5, y=33 in
from sketch; exact offset and size proposed

D02 | wc-divider | door | into WC | hinge high offset; 90 deg
Width 2' 6"; height 6' 6"; sill 0' 0"; offset 2' 0"; start x=238.5, y=33 in
from sketch; exact offset and size proposed

S01 | wc-divider | access | WC storage opens toward utility lobby
Width 2' 6"; height 2' 0"; sill 6' 9"; offset 1' 3"; start x=238.5, y=24 in
user-requested storage; shelf, height and hatch dimensions proposed

D03 | service-cross | door | into Room 1 | hinge high offset; 90 deg
Width 3' 0"; height 7' 0"; sill 0' 0"; offset 8' 0"; start x=105, y=73.5 in
from sketch; exact offset and size proposed

D04 | service-cross | door | into Room 2 | hinge low offset; 90 deg
Width 3' 0"; height 7' 0"; sill 0' 0"; offset 12' 6"; start x=159, y=73.5 in
from sketch; exact offset and size proposed

D05 | room-cross | door | into Room 1 | hinge high offset; 90 deg
Width 3' 0"; height 7' 0"; sill 0' 0"; offset 8' 0"; start x=105, y=226.5 in
from sketch; exact offset and size proposed

D06 | room-cross | door | into Room 2 | hinge low offset; 90 deg
Width 3' 0"; height 7' 0"; sill 0' 0"; offset 12' 6"; start x=159, y=226.5 in
from sketch; exact offset and size proposed

D07 | front-cross | door | into Room 3 | hinge high offset; 90 deg
Width 3' 0"; height 7' 0"; sill 0' 0"; offset 8' 4"; start x=109, y=415.5 in
from sketch; exact offset and size proposed

D08 | front | door | into Room 3 | hinge high offset; 90 deg
Width 3' 0"; height 7' 0"; sill 0' 0"; offset 9' 3"; start x=111, y=592.5 in
from sketch; exact offset and size proposed

D09 | front | door | into entrance hall | hinge low offset; 90 deg
Width 3' 0"; height 7' 0"; sill 0' 0"; offset 14' 6"; start x=174, y=592.5 in
proposed main entry; sketch shows only Room 3 exterior door

A01 | room-cross | access | wardrobe doors face Room 1
Width 4' 0"; height 5' 0"; sill 3' 0"; offset 0' 0"; start x=9, y=226.5 in
proposed upper recess over temple, requires lintel/support design

W01 | left | window | fixed glazing
Width 2' 0"; height 3' 0"; sill 3' 6"; offset 22' 6"; start x=4.5, y=279 in
from kitchen mark; exact placement and size proposed


W02 | front | window | sliding
Width 4' 0"; height 4' 0"; sill 3' 0"; offset 3' 0"; start x=36, y=592.5 in
from Room 3 front hatch; size/offset proposed

01 - Warm Indian teak

01 / WARM INDIAN TEAK

Same measured geometry | roofless transparent-wall cutaway

Walls: 9 in thick, 9 ft high | WC ceiling: 6 ft 6 in; storage above

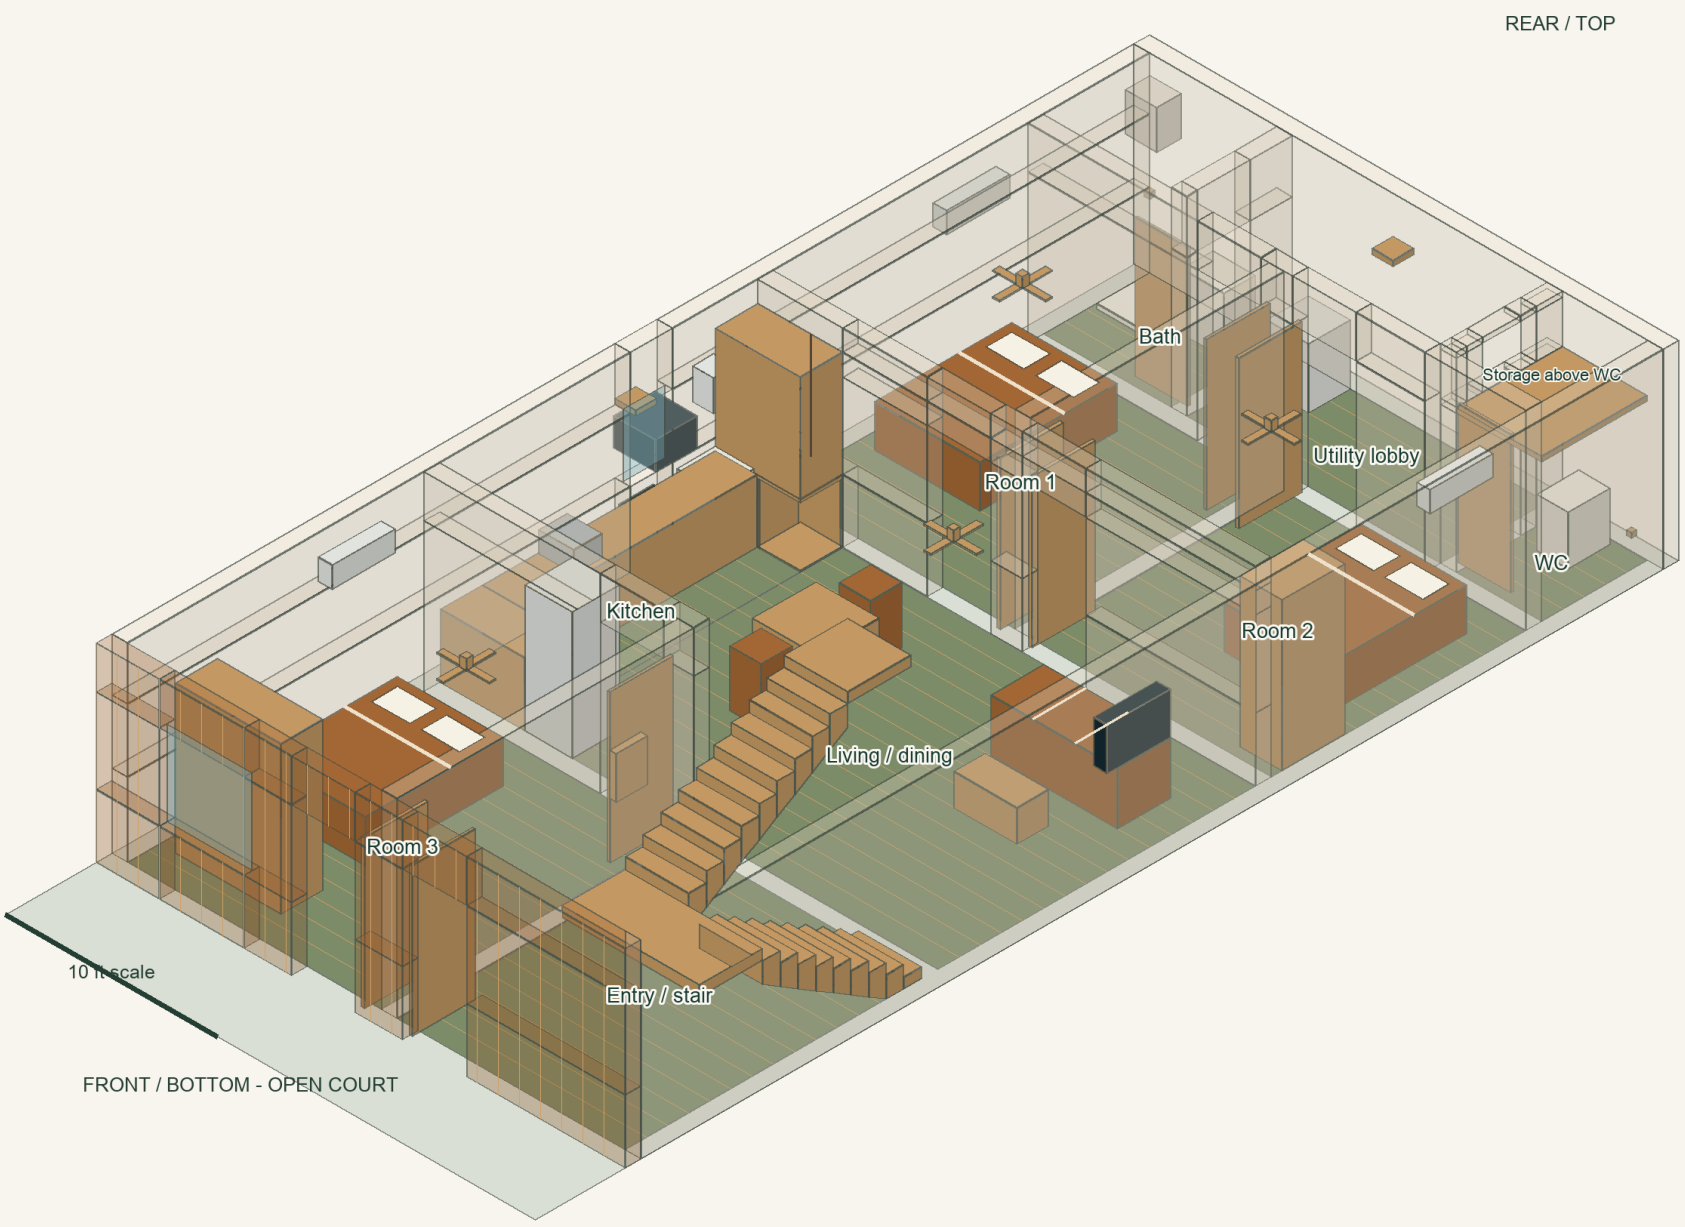

Site 25' x 54' | House 25' x 49' 9" | Court 4' 3"

Stair: 20 risers @ 6 in; 9 goings/flight @ 10 in; 36 in clear

Proposed open stair shaft: 9 ft headroom; floor-to-floor 10' 0"

Return: 4 ft x 2 ft; temple niche: 2 ft x 2 ft x 3 ft; wardrobe above: full return x 5' 0" high

Full-height translucent cuboids expose the layout; actual apertures removed from walls.


Finish palette changes only; geometry and furniture positions are identical across options.

02 - Jaipur terracotta

02 / JAIPUR TERRACOTTA

Same measured geometry | roofless transparent-wall cutaway

Walls: 9 in thick, 9 ft high | WC ceiling: 6 ft 6 in; storage above

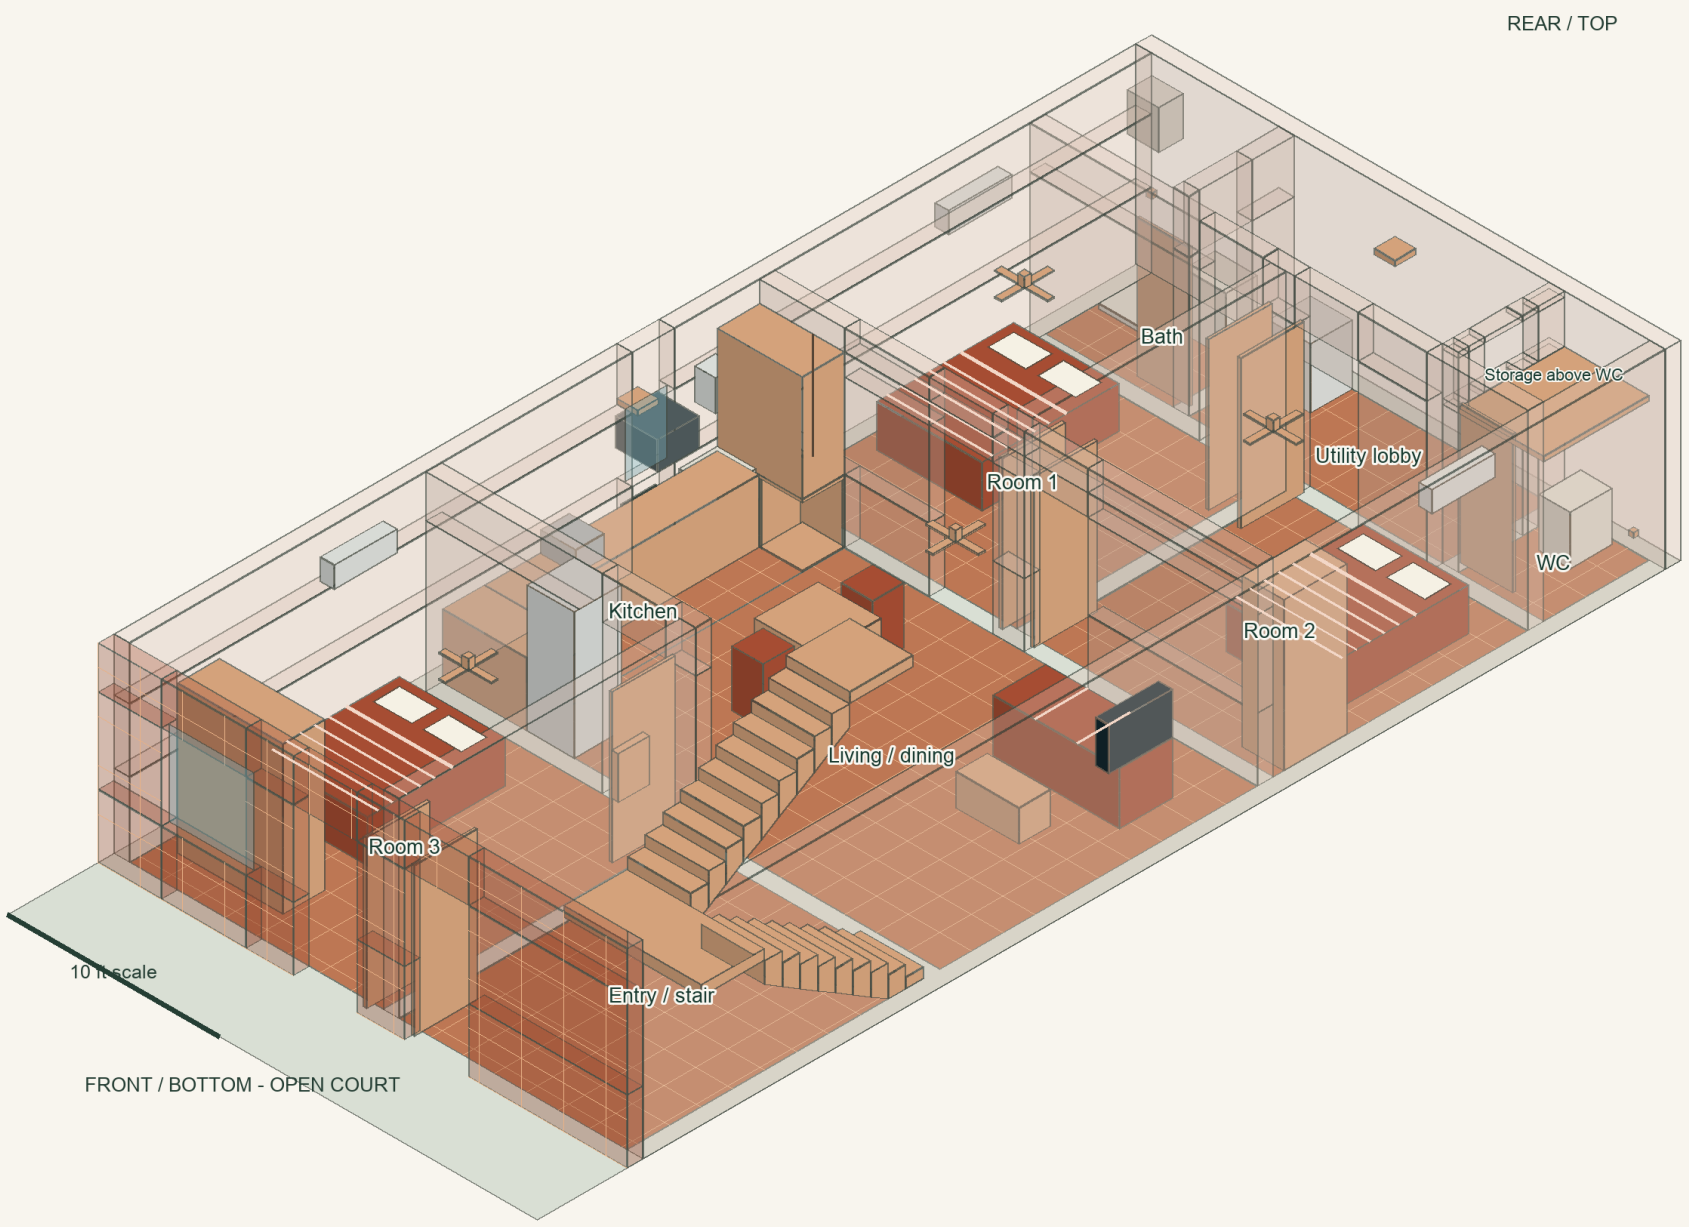

Site 25' x 54' | House 25' x 49' 9" | Court 4' 3"

Stair: 20 risers @ 6 in; 9 goings/flight @ 10 in; 36 in clear

Proposed open stair shaft: 9 ft headroom; floor-to-floor 10' 0"

Return: 4 ft x 2 ft; temple niche: 2 ft x 2 ft x 3 ft; wardrobe above: full return x 5' 0" high

Full-height translucent cuboids expose the layout; actual apertures removed from walls.

Finish palette changes only; geometry and furniture positions are identical across options.

03 - Kerala timber

03 / KERALA TIMBER

Same measured geometry | roofless transparent-wall cutaway

Walls: 9 in thick, 9 ft high | WC ceiling: 6 ft 6 in; storage above



Site 25' x 54' | House 25' x 49' 9" | Court 4' 3"

Stair: 20 risers @ 6 in; 9 goings/flight @ 10 in; 36 in clear

Proposed open stair shaft: 9 ft headroom; floor-to-floor 10' 0"

Return: 4 ft x 2 ft; temple niche: 2 ft x 2 ft x 3 ft; wardrobe above: full return x 5' 0" high

Full-height translucent cuboids expose the layout; actual apertures removed from walls.


Finish palette changes only; geometry and furniture positions are identical across options.

04 - Coastal indigo

04 / COASTAL INDIGO

Same measured geometry | roofless transparent-wall cutaway

Walls: 9 in thick, 9 ft high | WC ceiling: 6 ft 6 in; storage above

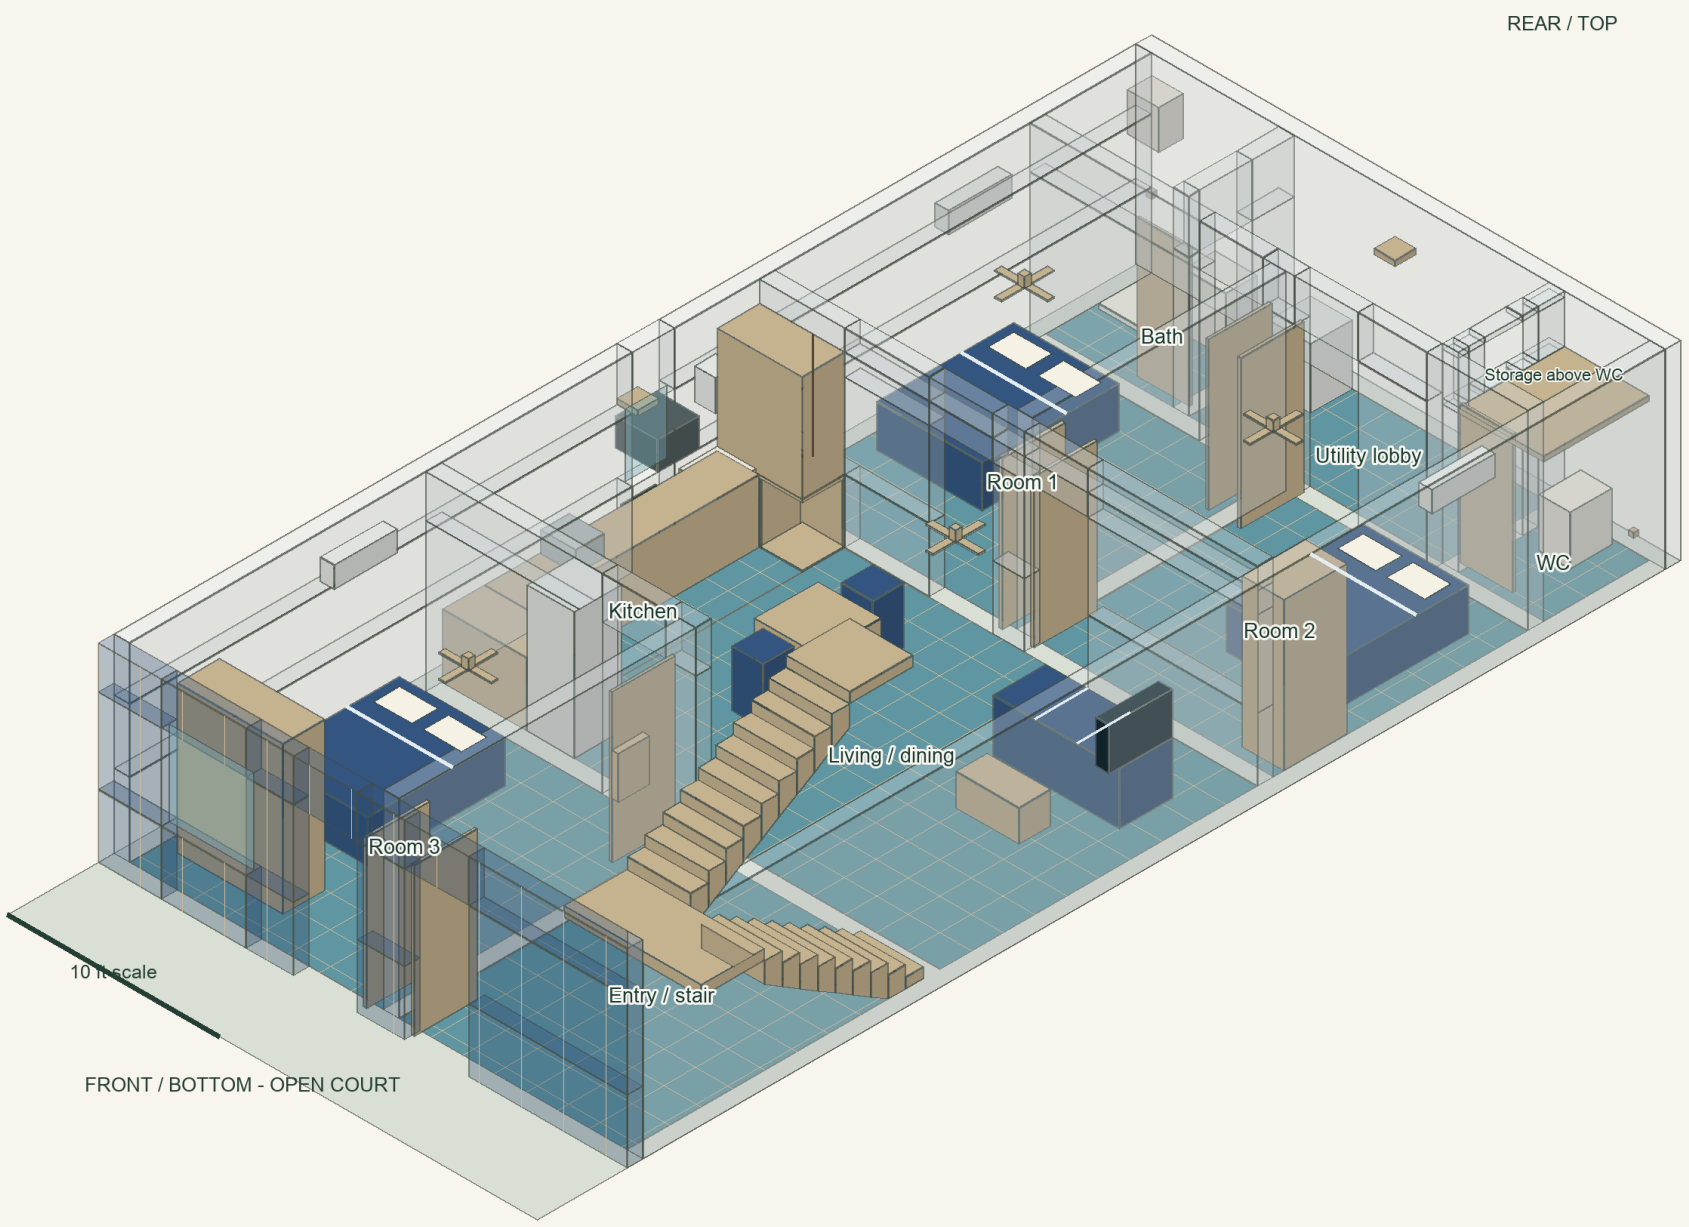

Site 25' x 54' | House 25' x 49' 9" | Court 4' 3"

Stair: 20 risers @ 6 in; 9 goings/flight @ 10 in; 36 in clear

Proposed open stair shaft: 9 ft headroom; floor-to-floor 10' 0"

Return: 4 ft x 2 ft; temple niche: 2 ft x 2 ft x 3 ft; wardrobe above: full return x 5' 0" high

Full-height translucent cuboids expose the layout; actual apertures removed from walls.


Finish palette changes only; geometry and furniture positions are identical across options.

05 - Modern monochrome

05 / MODERN MONOCHROME

Same measured geometry | roofless transparent-wall cutaway

Walls: 9 in thick, 9 ft high | WC ceiling: 6 ft 6 in; storage above

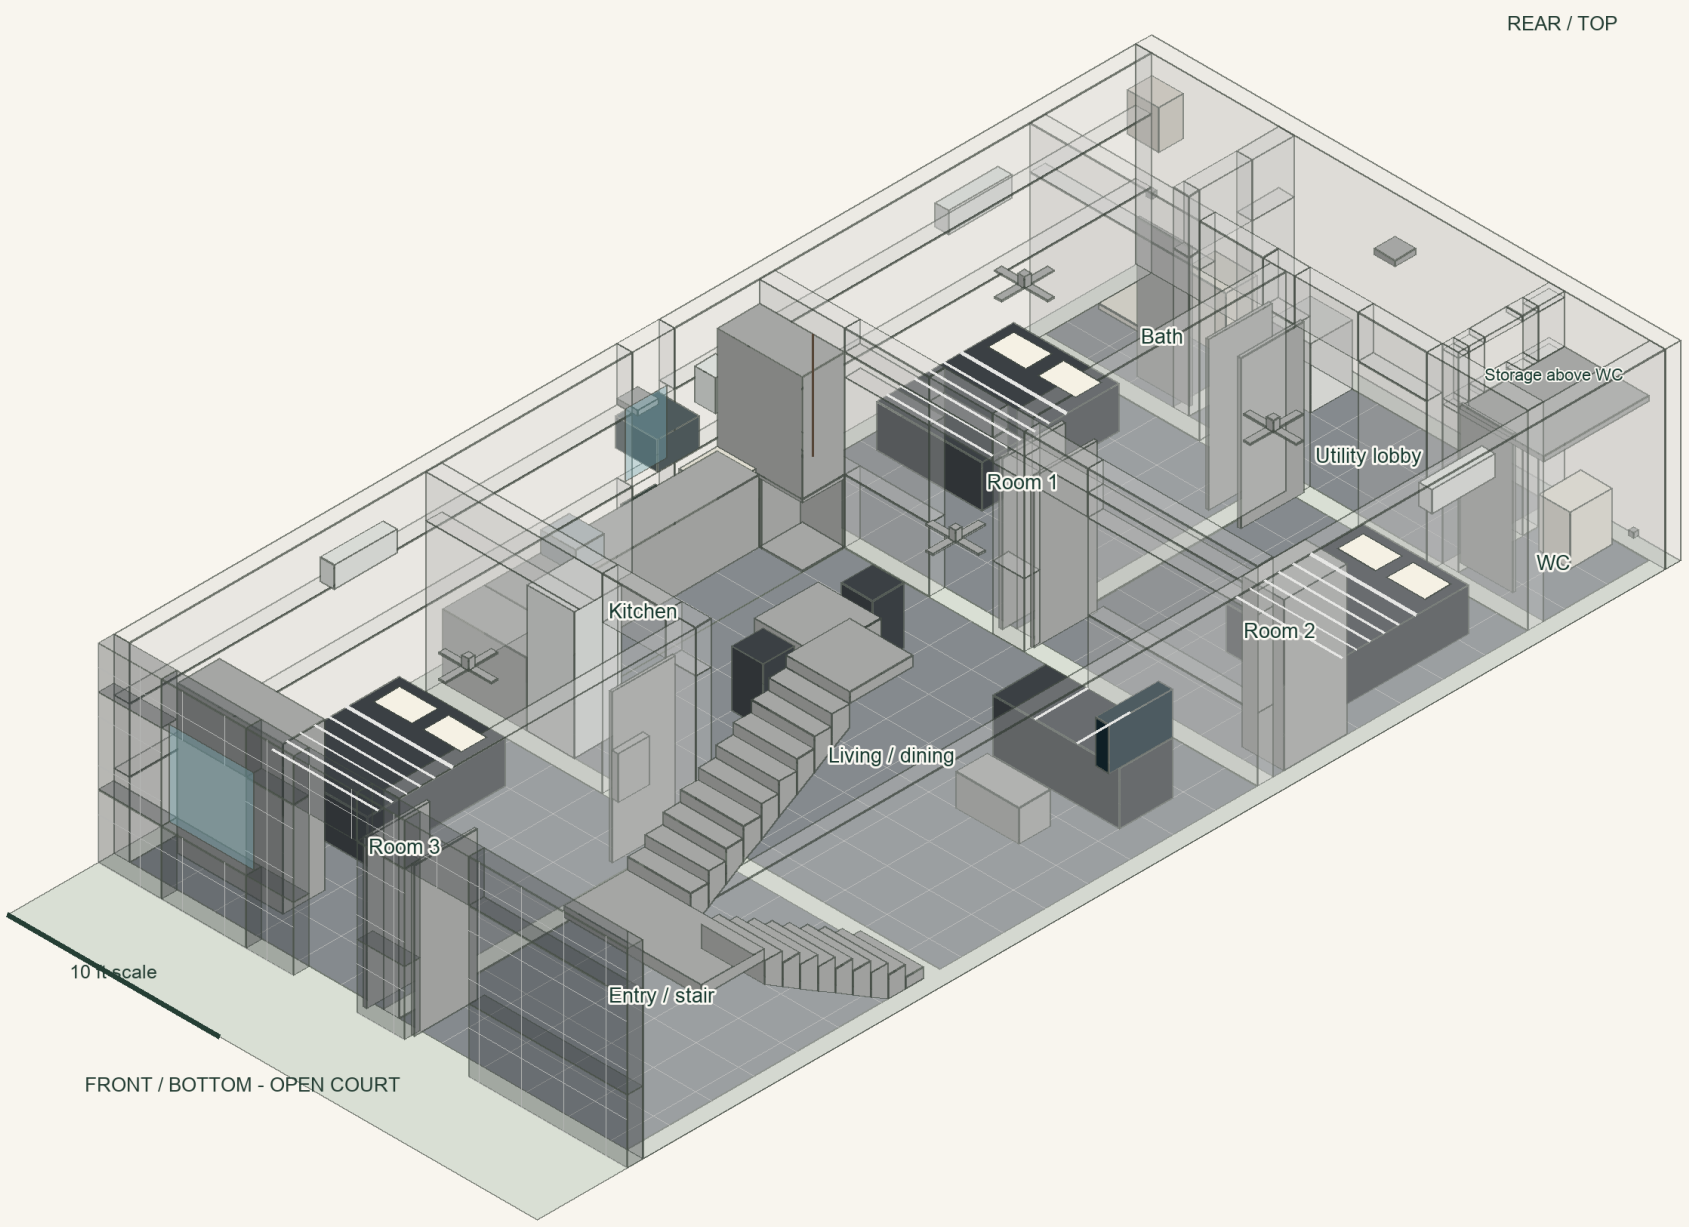

Site 25' x 54' | House 25' x 49' 9" | Court 4' 3"

Stair: 20 risers @ 6 in; 9 goings/flight @ 10 in; 36 in clear

Proposed open stair shaft: 9 ft headroom; floor-to-floor 10' 0"

Return: 4 ft x 2 ft; temple niche: 2 ft x 2 ft x 3 ft; wardrobe above: full return x 5' 0" high

Full-height translucent cuboids expose the layout; actual apertures removed from walls.


Finish palette changes only; geometry and furniture positions are identical across options.

06 - Sage courtyard

06 / SAGE COURTYARD

Same measured geometry | roofless transparent-wall cutaway

Walls: 9 in thick, 9 ft high | WC ceiling: 6 ft 6 in; storage above

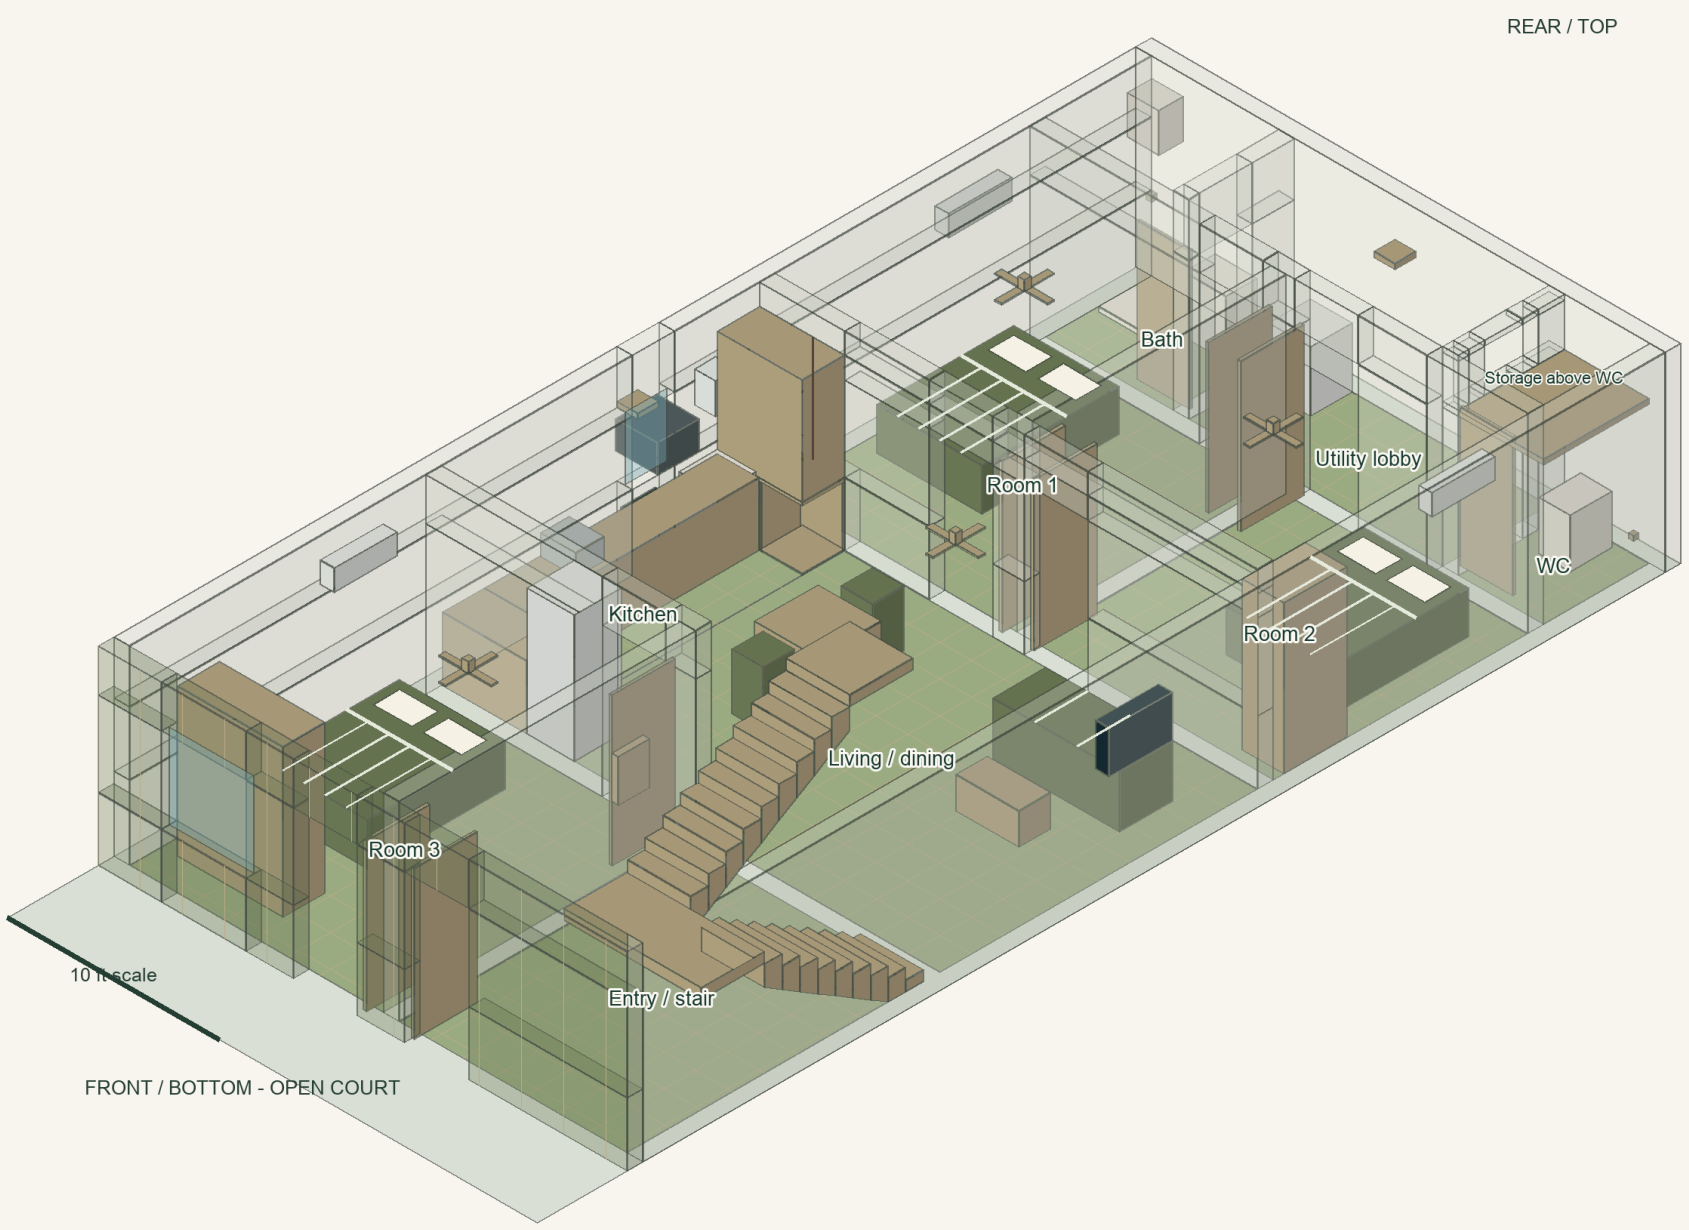

Site 25' x 54' | House 25' x 49' 9" | Court 4' 3"

Stair: 20 risers @ 6 in; 9 goings/flight @ 10 in; 36 in clear

Proposed open stair shaft: 9 ft headroom; floor-to-floor 10' 0"

Return: 4 ft x 2 ft; temple niche: 2 ft x 2 ft x 3 ft; wardrobe above: full return x 5' 0" high

Full-height translucent cuboids expose the layout; actual apertures removed from walls.

Finish palette changes only; geometry and furniture positions are identical across options.

07 - Royal maroon brass

07 / ROYAL MAROON BRASS

Same measured geometry | roofless transparent-wall cutaway

Walls: 9 in thick, 9 ft high | WC ceiling: 6 ft 6 in; storage above

Site 25' x 54' | House 25' x 49' 9" | Court 4' 3"

Stair: 20 risers @ 6 in; 9 goings/flight @ 10 in; 36 in clear

Proposed open stair shaft: 9 ft headroom; floor-to-floor 10' 0"

Return: 4 ft x 2 ft; temple niche: 2 ft x 2 ft x 3 ft; wardrobe above: full return x 5' 0" high

Full-height translucent cuboids expose the layout; actual apertures removed from walls.


Finish palette changes only; geometry and furniture positions are identical across options.

08 - Limewash minimal

08 / LIMEWASH MINIMAL

Same measured geometry | roofless transparent-wall cutaway

Walls: 9 in thick, 9 ft high | WC ceiling: 6 ft 6 in; storage above

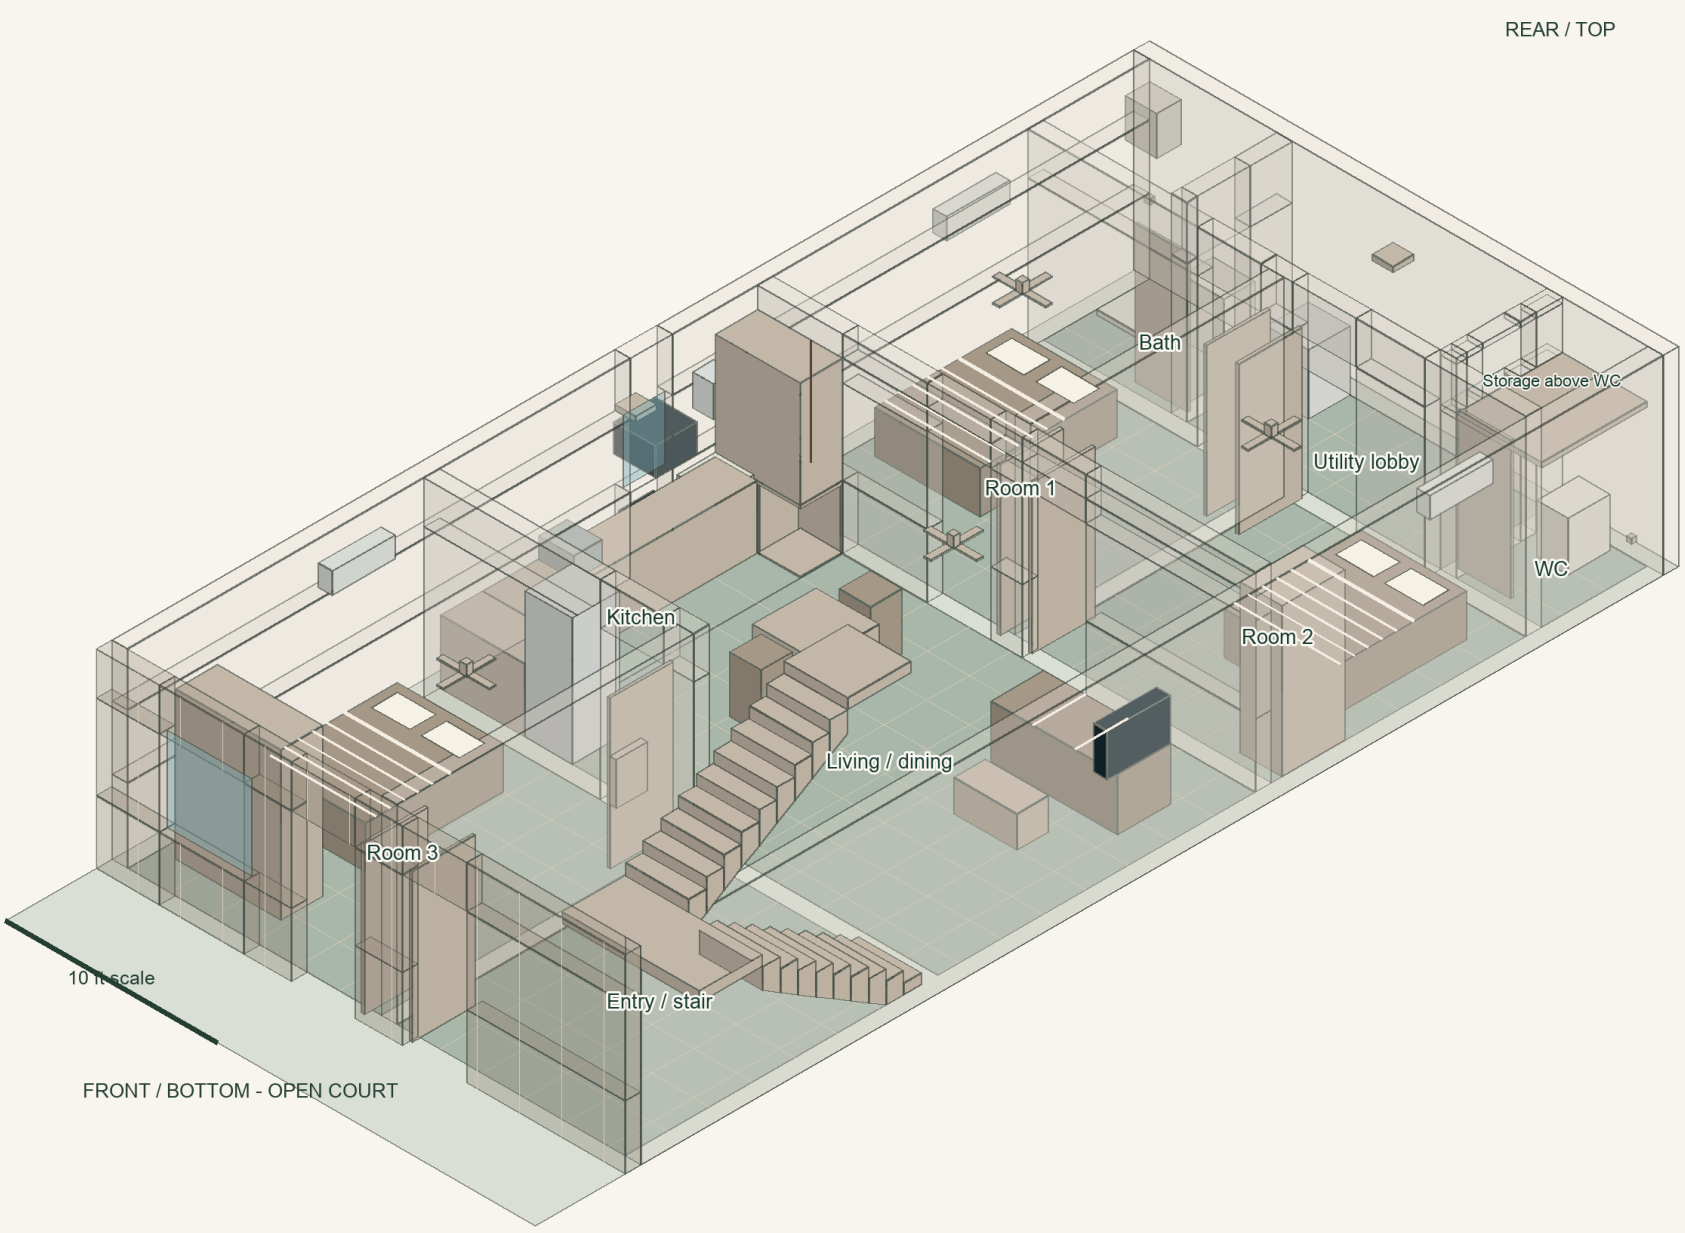

Site 25' x 54' | House 25' x 49' 9" | Court 4' 3"

Stair: 20 risers @ 6 in; 9 goings/flight @ 10 in; 36 in clear

Proposed open stair shaft: 9 ft headroom; floor-to-floor 10' 0"

Return: 4 ft x 2 ft; temple niche: 2 ft x 2 ft x 3 ft; wardrobe above: full return x 5' 0" high

Full-height translucent cuboids expose the layout; actual apertures removed from walls.


Finish palette changes only; geometry and furniture positions are identical across options.

09 - Gujarati bright craft

09 / GUJARATI BRIGHT CRAFT

Same measured geometry | roofless transparent-wall cutaway

Walls: 9 in thick, 9 ft high | WC ceiling: 6 ft 6 in; storage above

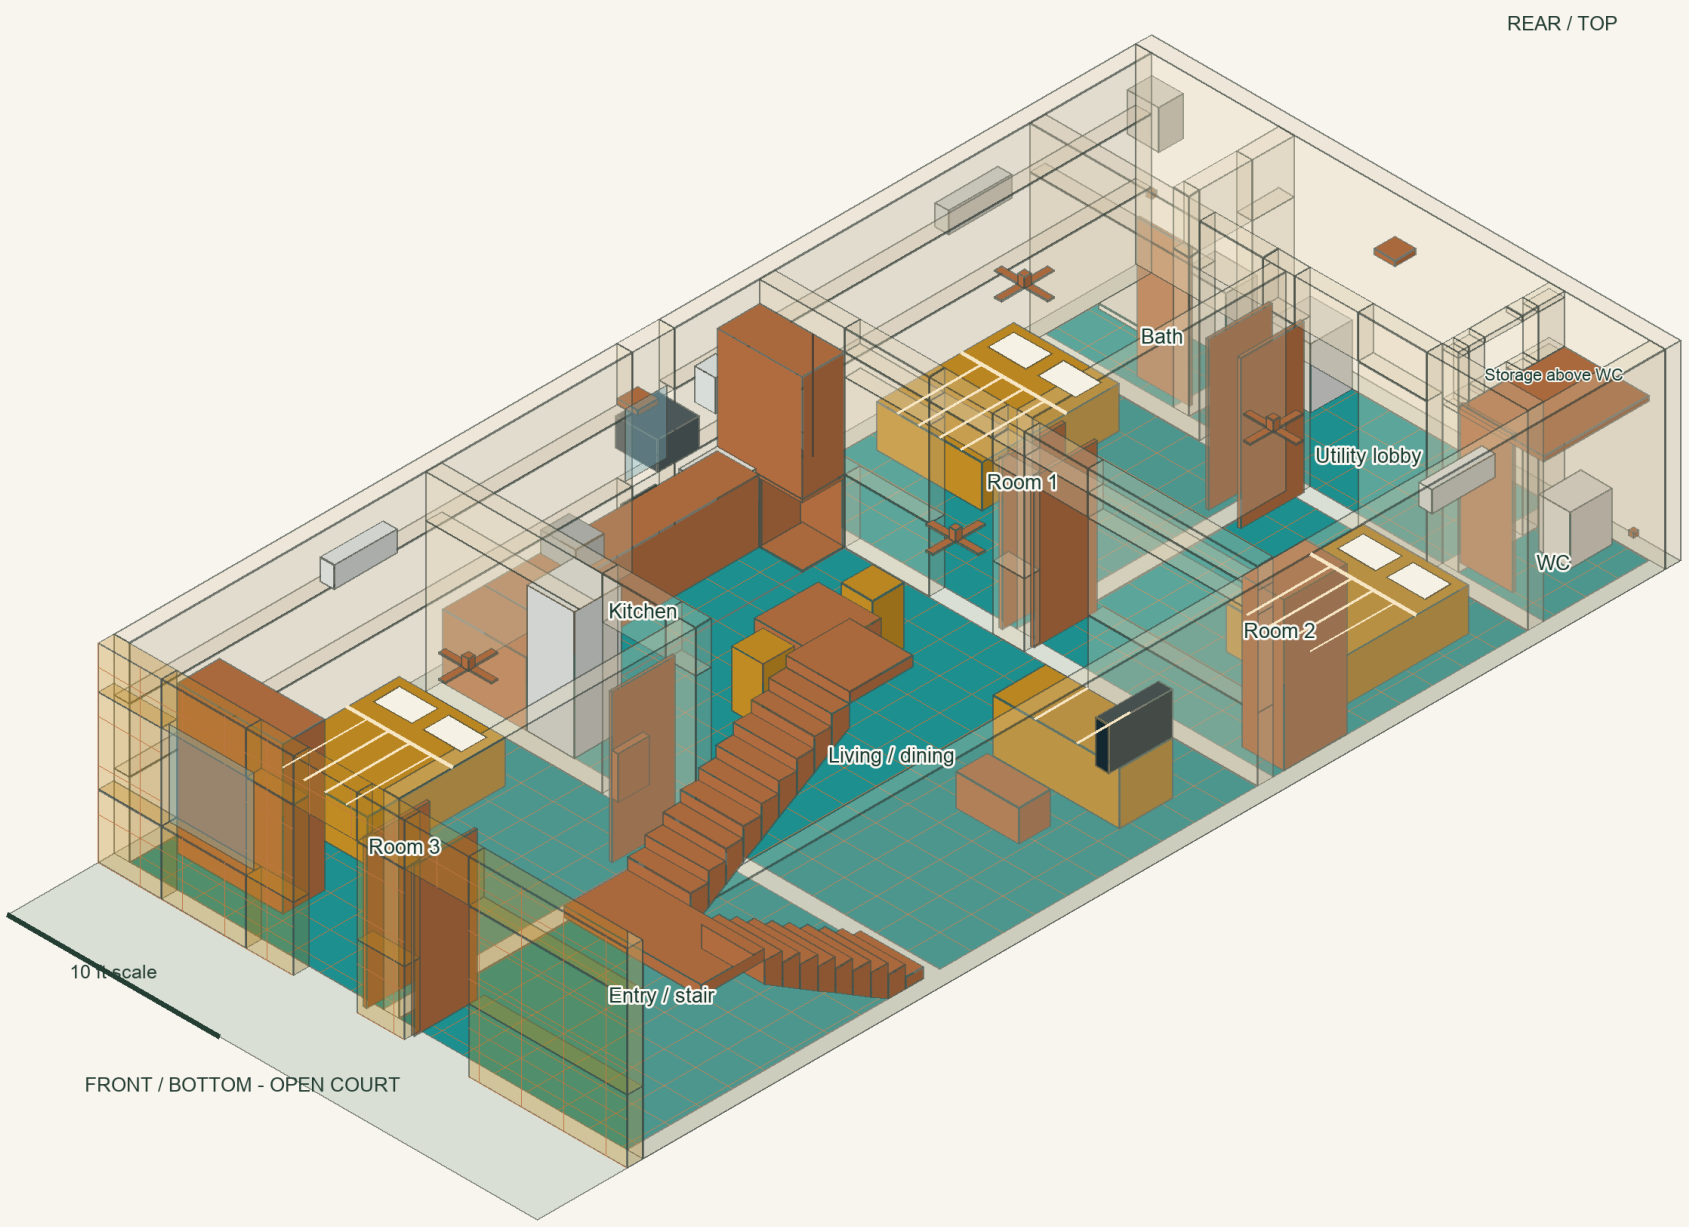

Site 25' x 54' | House 25' x 49' 9" | Court 4' 3"

Stair: 20 risers @ 6 in; 9 goings/flight @ 10 in; 36 in clear

Proposed open stair shaft: 9 ft headroom; floor-to-floor 10' 0"

Return: 4 ft x 2 ft; temple niche: 2 ft x 2 ft x 3 ft; wardrobe above: full return x 5' 0" high

Full-height translucent cuboids expose the layout; actual apertures removed from walls.


Finish palette changes only; geometry and furniture positions are identical across options.

10 - Deccan charcoal copper

10 / DECCAN CHARCOAL COPPER

Same measured geometry | roofless transparent-wall cutaway

Walls: 9 in thick, 9 ft high | WC ceiling: 6 ft 6 in; storage above

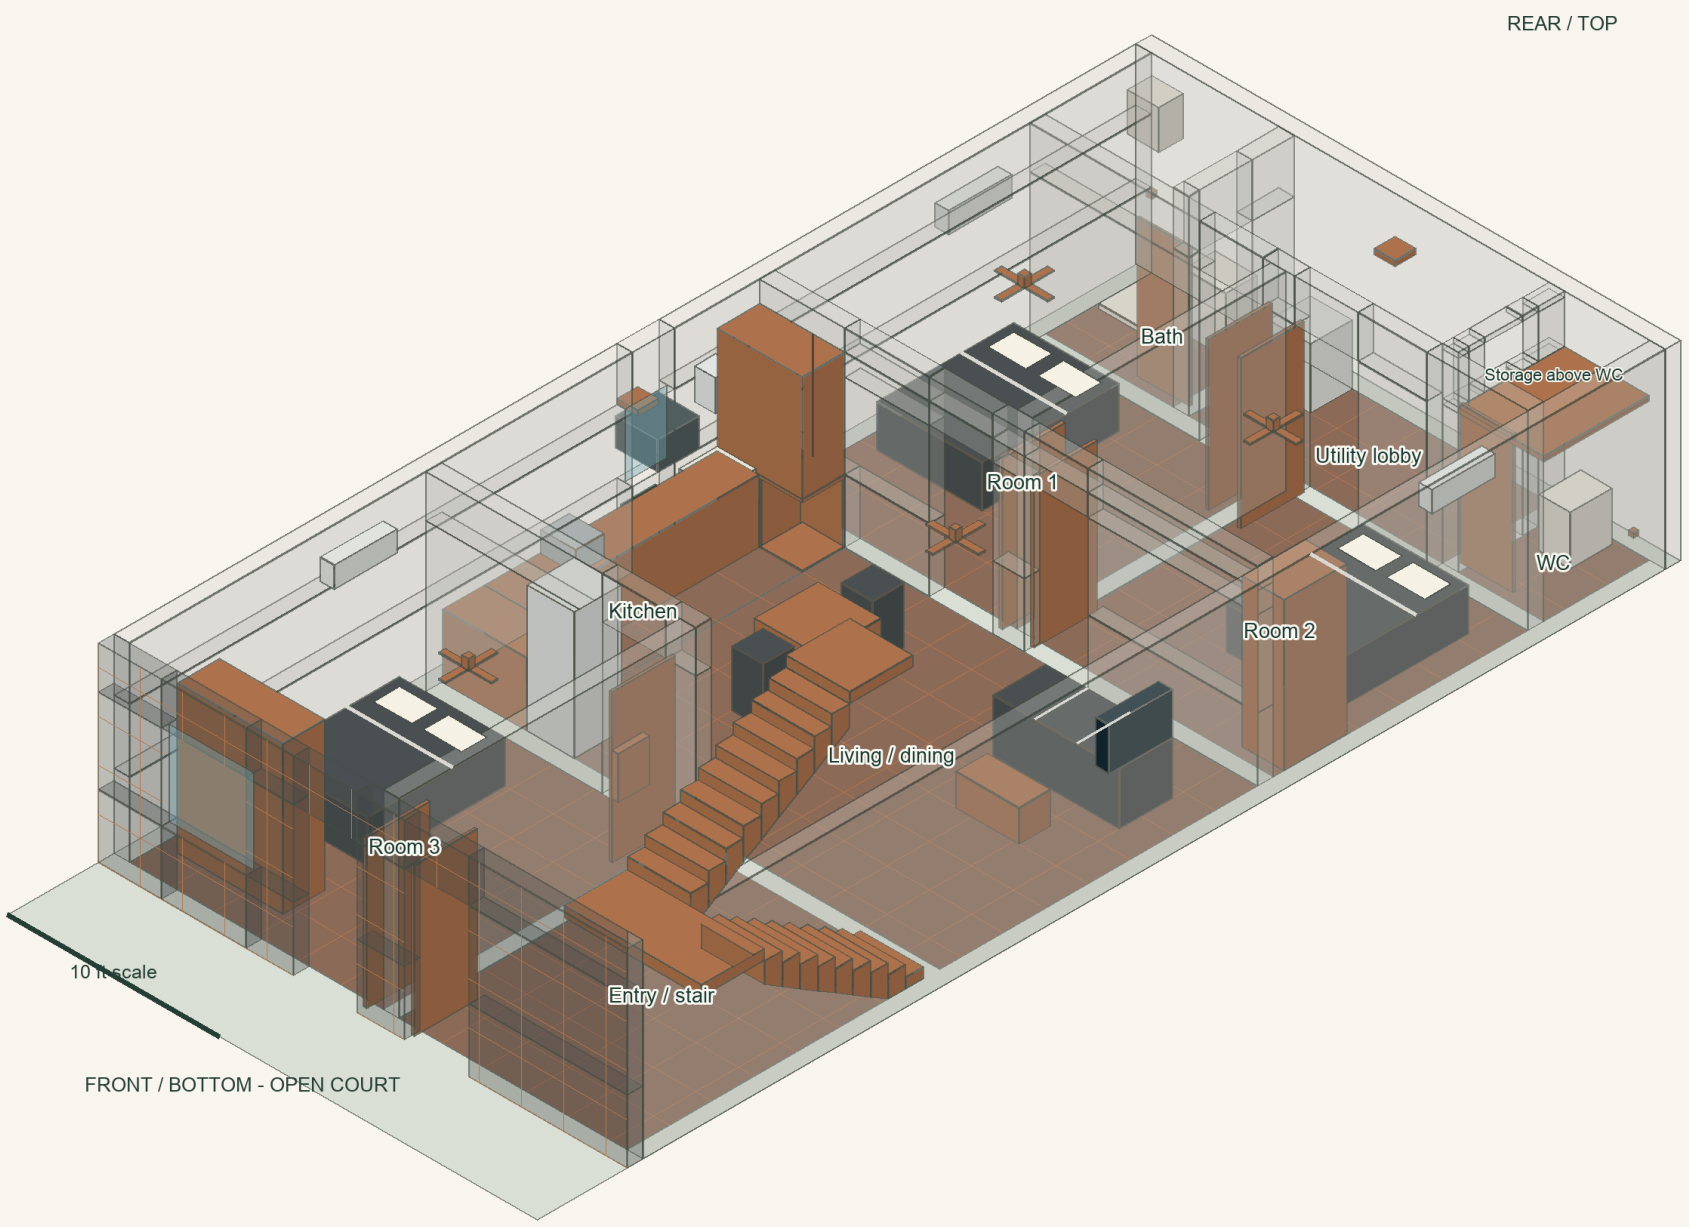

Site 25' x 54' | House 25' x 49' 9" | Court 4' 3"

Stair: 20 risers @ 6 in; 9 goings/flight @ 10 in; 36 in clear

Proposed open stair shaft: 9 ft headroom; floor-to-floor 10' 0"

Return: 4 ft x 2 ft; temple niche: 2 ft x 2 ft x 3 ft; wardrobe above: full return x 5' 0" high

Full-height translucent cuboids expose the layout; actual apertures removed from walls.

Finish palette changes only; geometry and furniture positions are identical across options.